Quartz Surfaces




Quartz Surfaces

Quartz, one of the most durable surfacing materials available, brings a beauty like no other to countertops, walls and wet-area surrounds.

The quartz surfaces Crossville is offering provides a wide range of fashionable choices, from clean pure whites to realistically veined stone looks in between. Our beautiful quartz is stain resistant and has high resistance to scratching and chipping. Quartz offers a surface solution you can depend on.

Our quartz products offer high technology combined with artistic standards designed to meet the most diverse projects, from classic to contemporary. With a clean aesthetic, the line presents wide versatilty and possibilities for architects, interior designers and end consumers. Fabricators will enjoy the ease of fabrication to make countertops in a single piece or use on walls as a unique decorative finish in wet areas. With the constant evolution of quartz manufacturing technology, our quartz surfaces offer the beauty of natural stone combined with guaranteed perfect finishes.



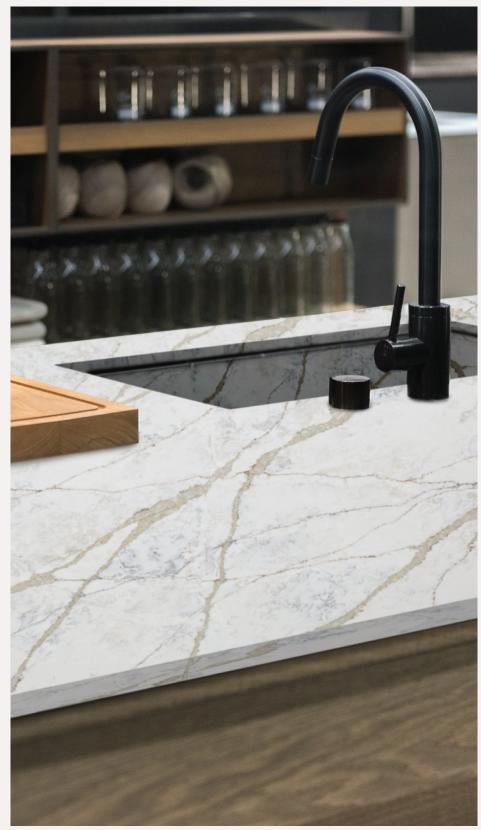

9950 Vagli Soto Polished






9992 Calacatta Nero Polished




9756 Grigio Linea Polished

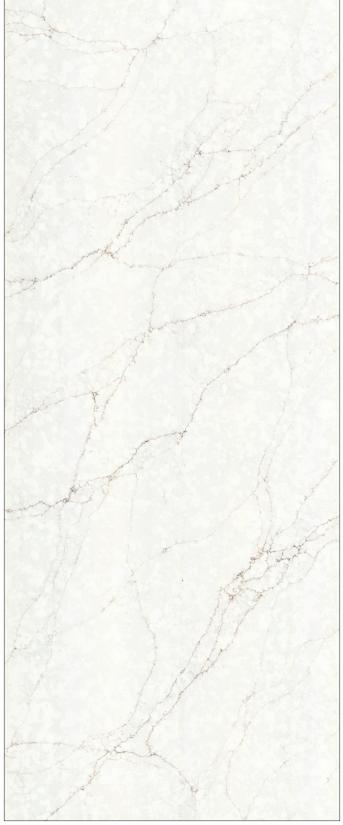

9522 Crema Café Polished



9642 Gioa Grigio Polished

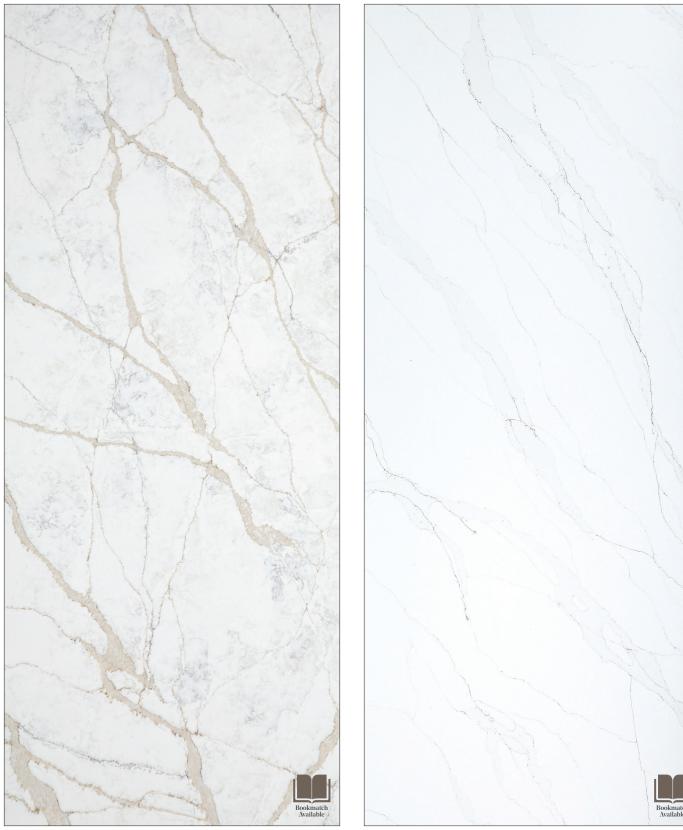

9950 Vagli Soto Polished

9956 Lucca Polished



9557 Azzano Polished



9969 Colonata Polished



9581 Valentino Polished



9900 Bianco Carrara Polished




9946 Bianco Diana Polished




8201 Bergiola Polished



8203 La Foce Polished

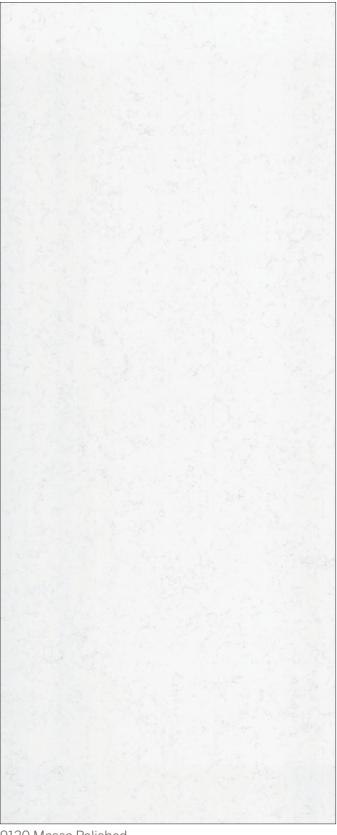

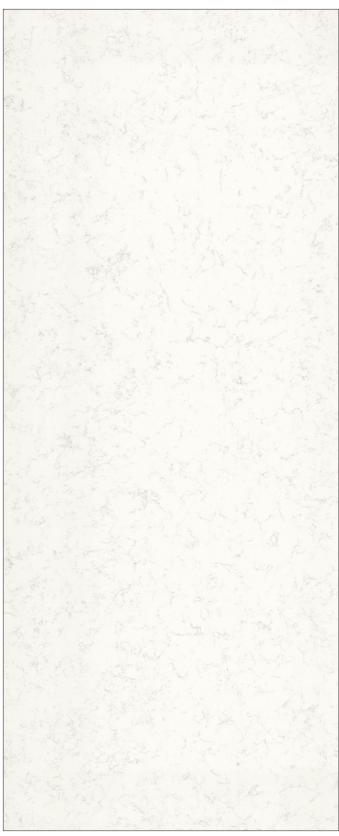

9120 Massa Polished

9122 Forno Polished







Specifications

Size



Sizes & Finishes				
Quartz Slab				
Nominal (in)	Thickness)	Weight	Finish	
126" x 63"	2cm/3cm	542/814 lbs	Polished	
Product Performance				
Gloss	47% minimum			
Scale of Hardness	6-7	Mohs		
Density	2.4g/cm ³	ASTM	ASTM C-97	
Water Absorption	<0.3%	ASTM	ASTM C-97	
Abrasion Resistance	208	ASTM	ASTM C-501	
Flexural Strength	>5,300 psi	ASTM	ASTM D-790	
Impact Resistance	0.35 ft-lb/inch	ASTM D-256		
Compressive Strength	24,000 - 27,500	00 ASTM C-170		
Freeze/Thaw Resistance	No effect – 15 c	lo effect – 15 cycles ASTM C-1026		
Stain Resistance	Pass	ANSI	ANSI Z 124.6	
Chemical Resistance	Pass	ANSI	ANSI Z 124.6	
Cigarette Test	Pass	ANSI	ANSI Z 124.6	
Surface Burning	Class A	ASTM	E-84	
Fungal/Bacteria Resistance	No Growth	ASTM	G-21	
High Temperature Resistance	Pass	NEMA	LD3-3.6	

Dynamic Coefficient of Friction Range

Polished (Wet)	0.60	ASTM C-1028
Polished (Dry)	0.84	ASTM C-1028

Recommended Use

Quartz is recommended for countertops and interior walls.

Care and Maintenance

Regular cleaning is the best way to keep Quartz Surfaces looking good for years to come. Use clean, hot water (combined with a non-abrasive household cleaner for more aggressive cleaning). Rinse thoroughly and dry with a soft cloth to prevent water spots. No waxes or sealers are needed. More information regarding the care and maintenance of Crossville products is available at CrossvilleInc.com.

Handcrafted Quartz Slab Aesthetics

Natural variations in color, size and shape or distribution of the pattern or the background of the Crossville Quartz Surfaces product are inherent and unique characteristics of the product. Color samples provided are only representative and not an exact replication of what will be installed in your residence or commercial application.



